


DATA SHEET	CO2 VALVE WITH ELECTRICAL & PNEUMATIC ACTUATOR				PART NO: B004/DIN/EMD
DP-5.8/11-380	DATE : MAR 2011	REVISION : 00	SCALE : N.T.S	SHEET : 1 OF 1	APPD. BY: DB

INTRODUCTION :-

CEODEUX CYLINDER VALVE FITTED IN THE CO2 CYLINDER CAN BE OPERATED BY ELECTROMAGNETIC , PNEUMATIC PRESSURE & MANUAL RELEASE LEVER.

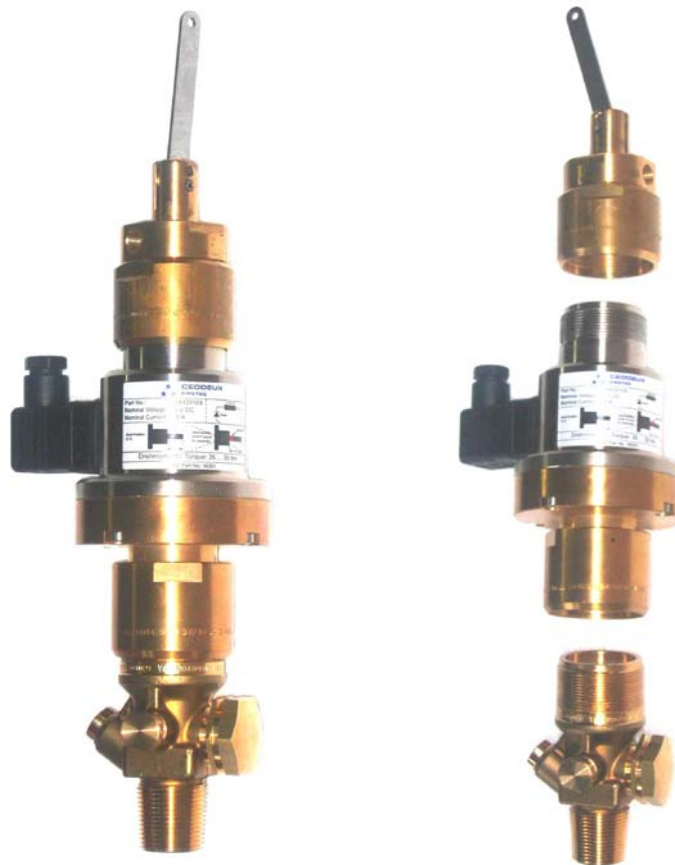

TECHNICAL SPECIFICATION

01	VALVE:		02	ELECTRICAL ACTUATOR:	
1.1	WORKING PRESSURE MAX.	250 BAR	2.1	CONNECTION	B=M42 X 1.5
1.2	TEMPERATURE RANGE	-20°C TO +60°C	2.2	NOMINAL VOLTAGE	24V DC
1.3	SEAT ORIFICE SIZE	12 mm	2.3	NOMINAL CURRENT	0.5A OR 1A
1.4	VALVE BODY	BRASS	2.4	CLASS	IP65
1.5	INLET CONNECTION	C=25E EN 629-1	03	PNEUMATIC ACTUATOR:	
1.6	OUTLET CONNECTION	A=W 21, 8 X 1/14" DIN 477	3.1	CONNECTION	B=M42 X 1.5
1.7	DIP TUBE CONNECTION	G=M16 X 1	3.2	PNEUMATIC CONNECTION	E=G 1/8"
			3.3	WORKING PRESSURE MIN.	15 BAR
			04	MANUFACTURER	CEODEUX (EU)
			05	APPROVAL	LPCB / VDS / CE

IMPORTANT:

AGNI CONTROLS RESERVES THE RIGHT TO CHANGE OR MODIFY WITHOUT PREVIOUS NOTICE ANY DATA OR SPECIFICATION DUE TO CHANGES OR MODIFICATION IN ORDER TO IMPROVE THE PRODUCTS / SYSTEM PRESENTED.



NO.1, 6TH STREET, Dr.SUBBARAYAN NAGAR, KODAMBAKKAM, CHENNAI-600 024, INDIA.

PHONE : +91 44 2481 2420, FAX : +91 44 2481 2475,

E-MAIL : engineering@agnicontrols.com WEBSITE : www.balafire.com

**ISO 9001 - 2008
CERTIFIED BY
BUREAU VERITAS**