

**DATA SHEET**


**HIGH PRESSURE ACTUATION HOSE**

PART NO : BIH022  
BIH023/ BIH381/  
BIH454

OLD DWG.NO.:DP-5.8/08-035	DATE : 14.03-08				
OLD DWG.NO.:DP-5.8/11-452	DATE : 13.09-11	REVISION : 00	SCALE : N.T.S	SHEET : 1 OF 1	APPD. BY :D.B
NEW DWG.NO.:DP-5.8/MT-239	DATE : JUN. 2013				

INTRODUCTION :-

HIGH PRESSURE WITH SS BRAIDING FLEXIBLE ACTUATION HOSE IS FITTED BETWEEN CYLINDER VALVES TO OPERATE CO2 SALVE VALVES  
PNEUMATICALLY ACTUATION HOSES ARE ALSO SUITABLE TO BE USED WITH DIRECTIONAL VALVE ACTUATORS & DISTRIBUTOR ASSEMBLY.

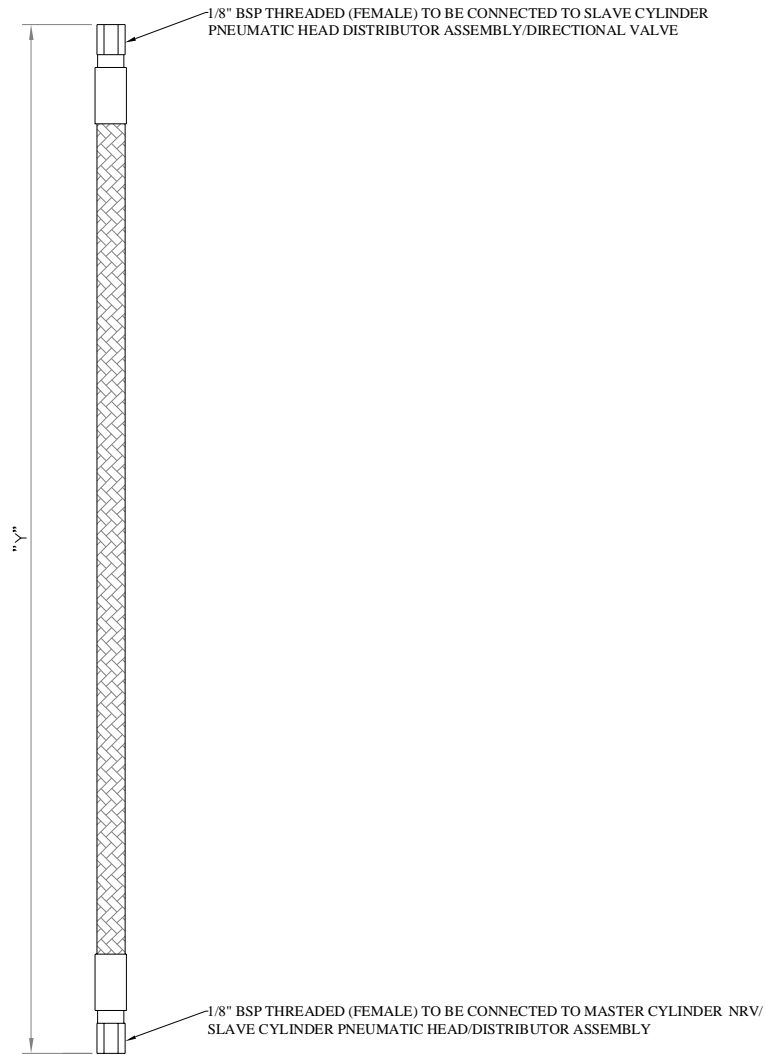

HIGH PRESSURE ACTUATION HOSE

SL NO	PART NO**	LENGTH "Y"
1	BIH022	550 MM
2	BIH023	300 MM
3	BIH381	1000 MM
4	BIH454	2000 MM

ALL DIMENSIONS ARE IN "mm" UNLESS OTHERWISE SPECIFIED

**TECHNICAL SPECIFICATION**

01. MAKE	AGNI CONTROLS	06. TESTING PRESSURE	10000 PSI (689 BAR)
02. CONSTRUCTION	OUTER WIRE BRAIDING OUT OF SS304	07. LENGTH	BASED ON REQUIREMENT
03. TEMPERATURE RANGE	-40°C TO +100°C		
04. NOMINAL BORE	3/16"		
05. MAX. WORKING PRESSURE	5000 PSI (345 BAR)		

IMPORTANT:

AGNI CONTROLS RESERVES THE RIGHT TO CHANGE OR MODIFY WITHOUT PREVIOUS NOTICE ANY DATA OR SPECIFICATION DUE TO CHANGES OR MODIFICATION IN ORDER TO IMPROVE THE PRODUCTS / SYSTEM PRESENTED.



ISO 9001 - 2008  
CERTIFIED BY  
BUREAU VERITAS

NO.1, 6TH STREET, Dr.SUBBARAYAN NAGAR,  
KODAMBAKKAM, CHENNAI-600 024, INDIA.  
PHONE : +91 44 2481 2420, FAX : +91 44 2481 2475,  
E-MAIL : engineering@agnicontrols.com WEBSITE : www.balafire.com